

GS-35 BENCHTOP BARWASHER

TECHNICAL SPECIFICATIONS

Racks/hour (theoretical)	30
Cycle time * ¹	120 sec
Power supply	240V
Wash pump	80W
Booster heater	2kW
Total power	2.08kW
Total current	9Amp
Wash tank capacity	10ltrs
Booster heater capacity	2.5ltrs
Water consumption (per cycle)	1.9ltrs
Min/max water pressure * ²	200/500kPa
Min/max water temp * ³	50/65°C
Rack size	350x350mm
Useful height	195mm
Weight (empty)	30kg
Weight (shipping)	33kg
Dimension (shipping)	47x54x74cm
Drain Type	Gravity (min 3ltr / sec)
Water connection	3/4" hose
Required hot water supply	55 ltr/hr
Drain hose diameter	22mm

- *¹ All Machines fitted with thermostop which may effect cycle time
- *² Optional booster pump available if pressure below 200kPa; reducer required if over 500kPa
- *³ Minimum incoming water temperature without loss of performance; units can operate with cold water at reduced performance.

Machine must be connected according to local regulations.

rhima
the power of clean

STANDARD FEATURES

- Insulated door
- Door safety switch
- Easy to use push button control
- Thermostop
- Built in rinse aid injector
- Fully automatic process
- Two minute cycle




The GS-35 is a compact, top quality stainless steel bench top bar washer.

Designed for areas with limited space, the GS-35 has all the benefits of the separate wash and rinse action used in larger machines.

The GS-35 is ideal for bars, coffee shops, wine cellars, take away and other food outlets that need to comply with HACCP guidelines.

TECHNICAL DRAWINGS

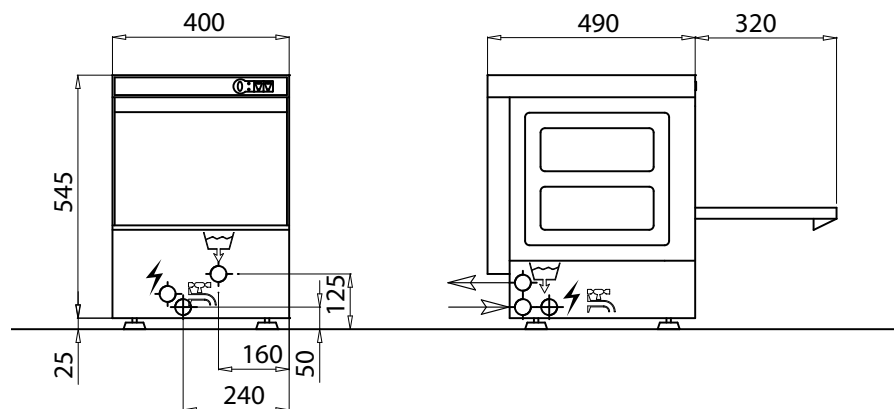

All details subject to change without notice

Rhima Australia

Tel: 1800 659 292 www.rhima.com.au

Industrial, catering and medical washing equipment

