



TECHNICAL SPECIFICATIONS

Racks/hour (theoretical)	20 / 10 / 6 / 5
Cycle time *1	180 / 360 / 540 / 720
Power supply	3~415+N 50Hz
Wash pump	1.75kW
Booster heater	9kW
Wash tank heater	6kW
Total power	12kW
Total current	20Amp
Wash tank capacity	78ltrs
Booster heater capacity	20ltrs
Water consumption (per cycle)	4.3ltrs
Min/max water pressure *2	200/600kPa
Min/max water temp *3	50/65°C
Rack size	700 x 700mm
Useful height	650mm
Weight (empty)	199kg
Weight (shipping)	229kg
Dimensions (shipping)	900L x 940W x 1940H
Drain pump	Optional (min 3ltr/sec)
Water connection	R3/4" hose
Required hot water supply	120 ltr/hr
Drain hose diameter	30mm

*1 All Machines fitted with thermostop which may may effect cycle time

*2 Optional booster pump is available if the water pressure is below 200kPa; reducer required if over 600kPa

*3 Minimum incoming water temperature without loss of performance; units can operate with cold water at reduced performance. (Optional 8kW cold water booster heater)

Machine must be connected according to local regulations.



STANDARD FEATURES


- Double skinned construction
- Deep-formed tank
- Independant stainless steel wash & rinse arms
- Double tank filter with debris collection system & pump filter
- Standard rinse pump
- Energy saving
- Self-diagnostic system
- Electronic controls with Multichromatic start key
- Four washing cycles
- Automatic self cleaning cycle
- Thermostop to guarantee the rinse temperature according to HACCP requirements



With a foot print of 840 x 885mm, the *LP2-S Plus* is one of Rhima's most popular pot and utensil washers. With a chamber height of 620mm the machine is perfectly suited for most small to medium sized operations.

The versatility of the *LP2-S Plus* is endless. Fully programmable with with CIP. The internal corners of the double skinned tank are rounded for easy cleaning.

TECHNICAL DRAWING

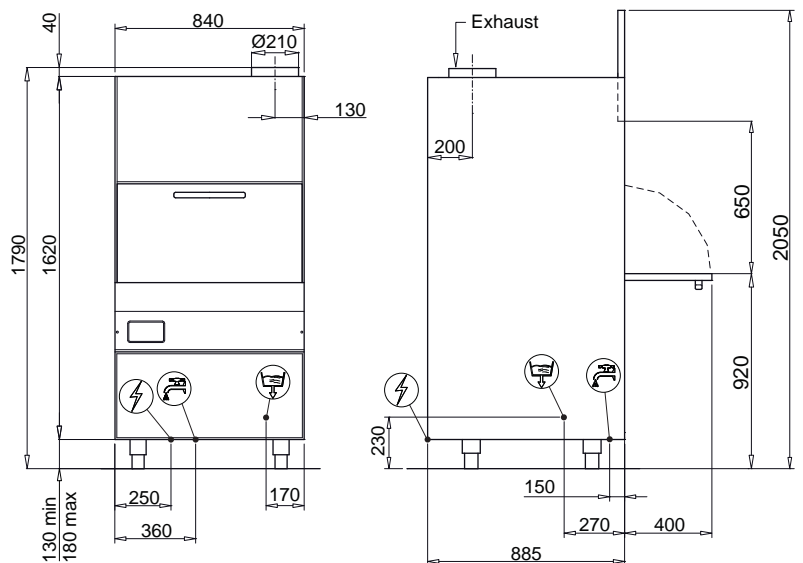

All details subject to change without notice

Call *Rhima Australia* today on **1300 347 944**