

# OPTIMA HT PLUS PASS-THROUGH DISHWASHER **rhima**



## TECHNICAL SPECIFICATIONS

Racks/hour (theoretical)	72/40/30/20/12
Cycle time *1	50/90/120/180/300 secs
Power supply	415 Vac 3N 50 Hz
Wash pump	1.5 kW
Boiler heater	9 kW
Wash tank heater	2.7 kW
Total power	10.5 kW
Total current	14.6 Amp
Wash tank capacity	42 ltrs
Boiler heater capacity	15 ltrs
Water consumption (per cycle)	2.8 ltrs
Min/max water pressure *2	200/400kPa
Min/max water temp *3	50/65°C
Rack size	500 x 500 mm
Useful height	410 mm
Max dish height	405 mm
Weight (empty)	125 kg
Weight (shipping)	143 kg
Dimension (shipping)	84 x 76 x 148 cm
Drain Type	Gravity
Water connection	3/4" hose
Required hot water supply	56 ltr/hr
Drain hose diameter	24 mm

\*1 All Machines fitted with thermostat which may effect cycle time

\*2 Optional booster pump is available if the water pressure is below 200kPa; reducer required if over 600kPa

\*3 Minimum incoming water temperature without loss of performance; units can operate with cold water at reduced performance.

Machine must be connected according to local regulations.


## STANDARD FEATURES

- Double skin insulated hood
- Five wash cycles
- Chair type tank
- Self cleaning vertical pump
- Built-in water softener available
- The PLUS system to grant a constant rinse temperature
- The Break Tank system to prevent backflow contaminations to the piping network
- User friendly multichrome START key
- Electronic control panel/LCD screen
- Self-diagnostic system

The OPTIMA HT PLUS is a popular dishwasher for straight through operation. The large rear venting hood has an ergonomic, wrap around handle which makes hood opening easy from all angles. The OPTIMA HT PLUS is fully panelled for safety & hygiene with anti-clogging stainless steel wash & rinse arms.



## TECHNICAL DRAWING

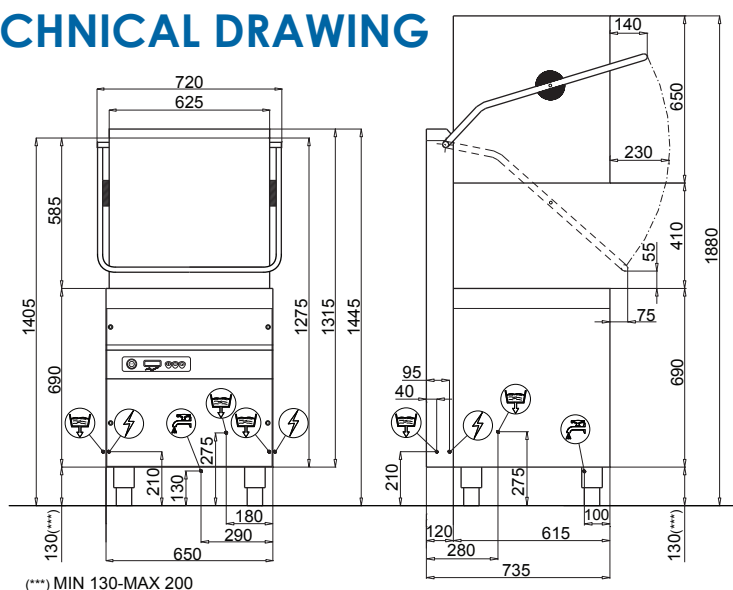

All details subject to change without notice

Call **Rhima Australia**  
today on **1800 659 292**

